

# How to upgrade the firmware in the DSN-1100-10

## [Topology]:


PC(192.168.1.111)-----(192.168.1.1)DSN-1100-10

## [Procedure]:

1. Go to the D-Link Support Web site (support.dlink.com).
2. Select your product model number from the pull-down menus.
3. Select the firmware topic.
4. Download the firmware.
5. When prompted to save the firmware file, click Save and save the file to a desired location.
6. Launch the XStack Storage Web Manager as follows:



The screenshot displays the XStack Storage Web Manager interface. The top section shows a login prompt with a key icon and a 'Please Log In' message. The login form includes fields for 'Username' (admin) and 'Password' (masked with dots), a 'Remember Me' checkbox, and a 'Log In' button. Below the login screen, the main dashboard is visible. The dashboard includes a 'Physical Storage' section with a pie chart showing 0 Bytes total, 0 Bytes in use, 0 Bytes spare, and 0 Bytes available. It also shows 0 Volumes without authorized iSCSI Initiator and 0 iSCSI Initiators. The 'System Actions' menu on the left includes options like 'Volume Creation Wizard', 'Add xStack', 'Remove xStack', 'Save Event History', and 'Log Out'. The 'Control' tab is selected, showing 'Software Current Version: 2.7.3.1' and 'Alternate Software Version: 2.7.8.3'. The 'Upgrade' button is highlighted with a red box.

7. On the View menu, click firmware **upgrade**. The message will be display.

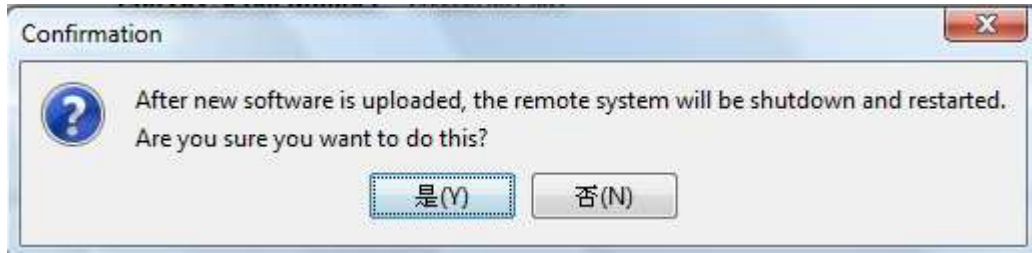

**Note:** Please make sure the Windows firewall will be turned off.


8. Click "OK" to continue. If you click "OK", the Open dialog box appears as follows:

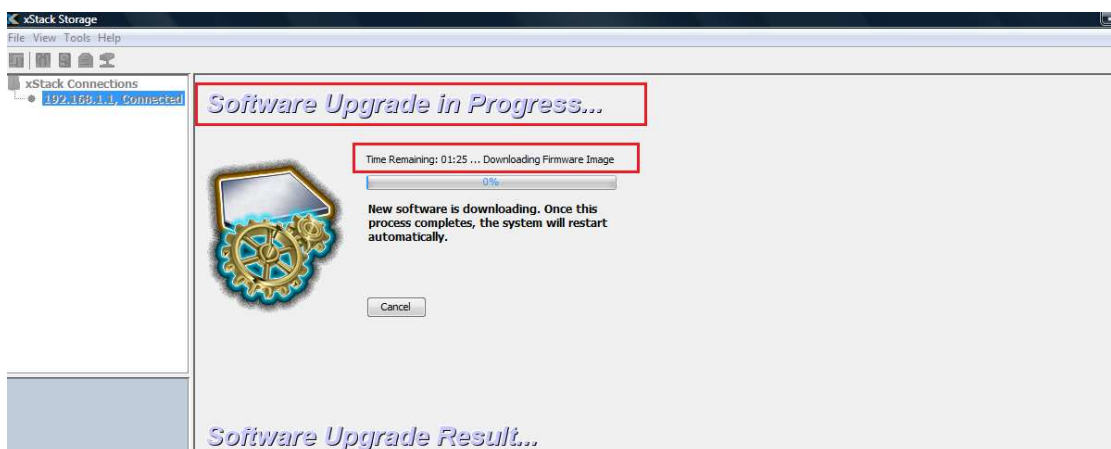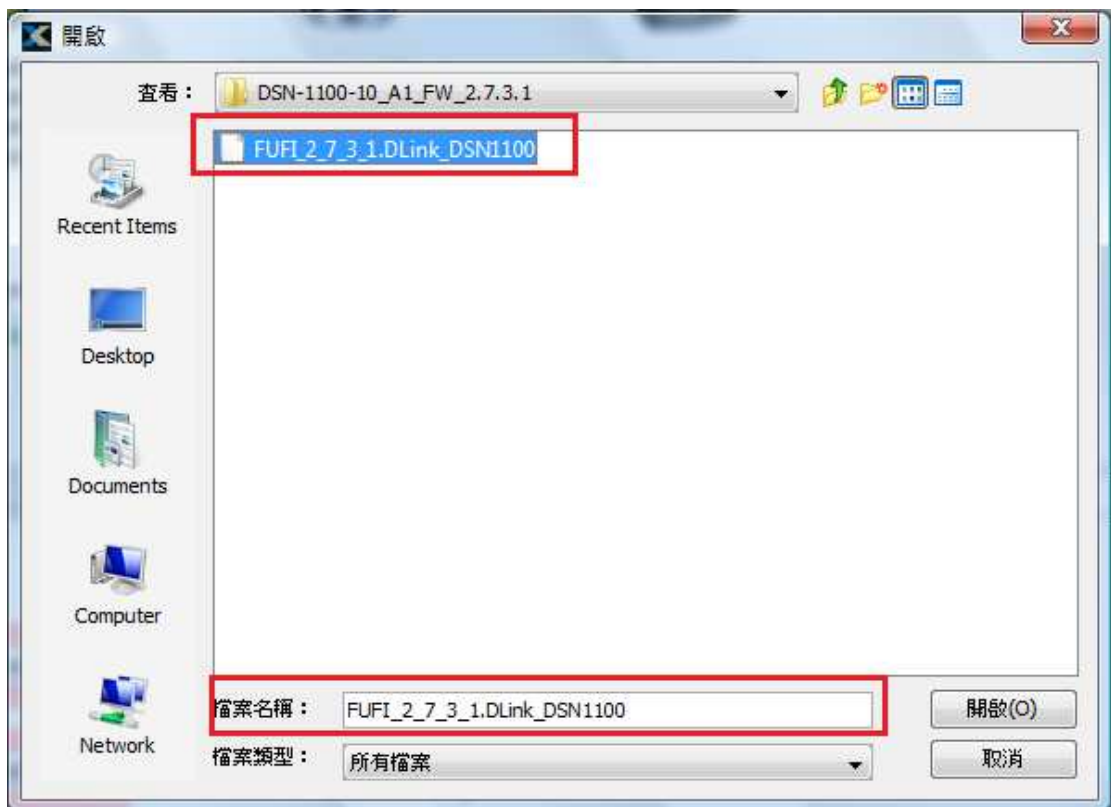

Testing result:

- xStack Connections
- 192.168.1.1, Connected
- Physical Storage
- System Administration
- Network Settings

**Physical Storage**




Total	0 Bytes	
In Use	0 Bytes	0%
Spare	0 Bytes	0%
Available	0 Bytes	0%

Status: Ok

State: Standalone


Write Cache Mode: Write Back

**0 Volumes**



0 Volumes without authorized iSCSI Initiator

**0 iSCSI Initiators**



0 Connected

Durable Name: 60015E90200037F10000000000000000  
 Chassis Serial Number: Chassis 001-001

- System Actions**
- Volume Creation Wizard
  - Add xStack
  - Remove xStack
  - Save Event History
  - Log Out

History (CDT) | Controller | Tasks | Control | System Policy | User Accounts | Advanced Settings

**Software Current Version:** 2.7.3.1

**Alternate Software Version:** 2.7.3.1

Restart    Shutdown

Use Alternate Version    Upgrade

**xStack Configuration:**

Save

Restore