


Show Port Status via SNMP on DXS-3326GSR

Port Status

MIB: DXS3326GSR-SWL2MGMT-MIB

OID: 1.3.6.1.4.1.171.11.59.7.2.3.1.1.4

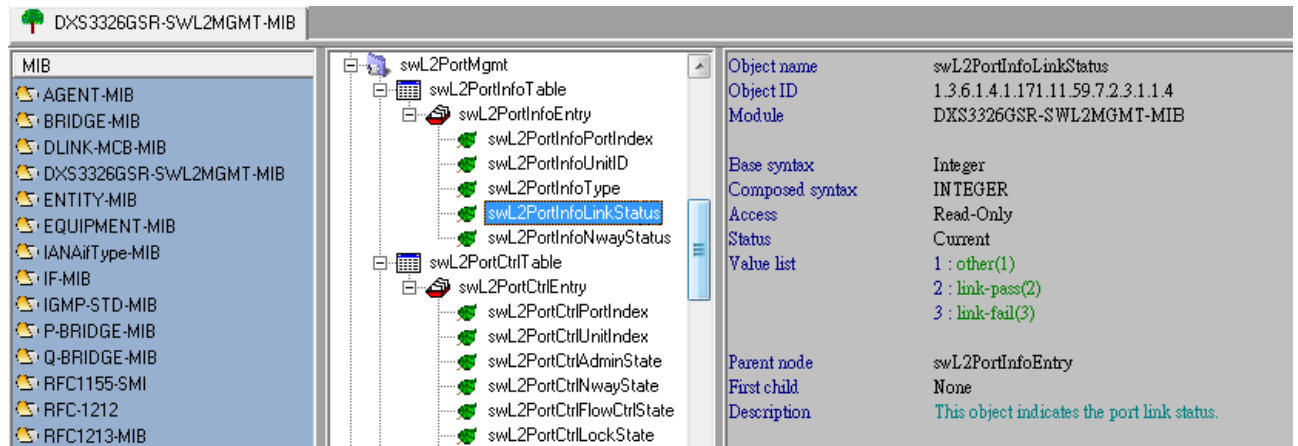

The screenshot displays a network management interface for the MIB DXS3326GSR-SWL2MGMT-MIB. The left pane shows a list of MIBs, with DXS3326GSR-SWL2MGMT-MIB selected. The middle pane shows a tree view of the MIB structure, with swL2PortInfoLinkStatus highlighted. The right pane provides details for the selected object:

Object name	swL2PortInfoLinkStatus
Object ID	1.3.6.1.4.1.171.11.59.7.2.3.1.1.4
Module	DXS3326GSR-SWL2MGMT-MIB
Base syntax	Integer
Composed syntax	INTEGER
Access	Read-Only
Status	Current
Value list	1 : other(1) 2 : link-pass(2) 3 : link-fail(3)
Parent node	swL2PortInfoEntry
First child	None
Description	This object indicates the port link status.

Command Example:

```
snmpwalk -v 2c -c public 10.90.90.90 1.3.6.1.4.1.171.11.59.7.2.3.1.1.4
```

```
snmpwalk -v 2c -c public 10.90.90.90 1.3.6.1.4.1.171.11.59.7.2.3.1.1.4.23
```

↑
port number