


You can use mib "RADLAN-DEVICEPARAMS-MIB" -> "rndImageInfoTable" for check the firmware information on DGS-3100 via SNMP

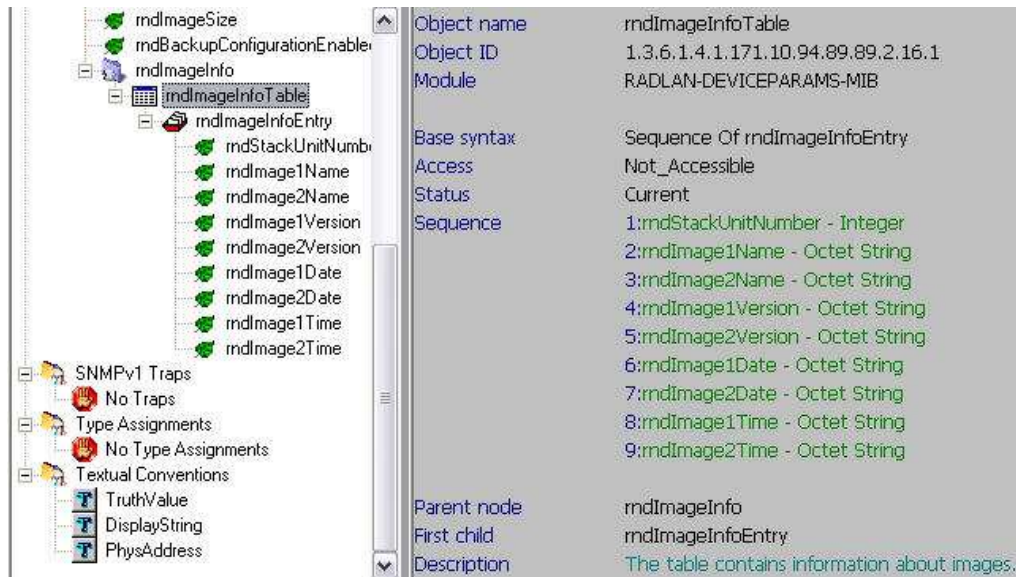

sh firmware information on DGS-3100 via SNMP:

```
C:\>snmpwalk -v 2c -c public 10.90.90.90 1.3.6.1.4.1.171.10.94.89.89.2.16.1
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.1.1 = INTEGER: 1
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.2.1 = STRING: "image-1"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.3.1 = STRING: "image-2"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.4.1 = STRING: "3.53.T29"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.5.1 = STRING: "3.00.43"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.6.1 = STRING: " 06-Dec-2009"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.7.1 = STRING: " 09-Jul-2009"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.8.1 = STRING: " 16:02:16"
SNMPv2-SMI::enterprises.171.10.94.89.89.2.16.1.1.9.1 = STRING: " 17:03:43"
```